

Technical specification



Suitable for the following cable types:

- Non-armoured cable

Operating temperature:

-40°C to +85°C

Matierial:

- Polyamide
- Large cable connection area.
- Low torque required for tightening.
- Integrated sealing lip on thread.


Ingress protection (IP):

IP66

Certifications and compliances:

ATEX certificate no: PTB 00 ATEX 3121  
II 2 G Ex e II / II 2 D Ex tD A21 IP66

IECEX certificate no: IECEX BKI 08.0007  
Ex e II / Ex tD A21 IP66 T85°C

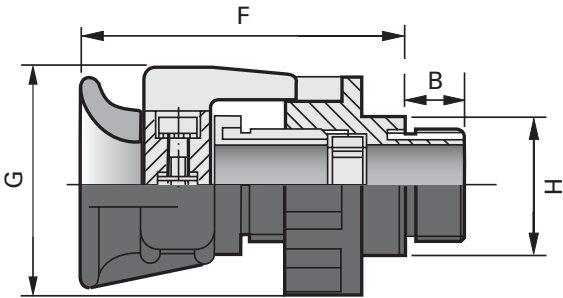

SELECTION TABLE		DIMENSIONS					CATALOG NUMBER
GLAND SIZE	METRIC SIZE	GLAND LENGTH 'F' (LESS ENTRY)	OUTER SHEATH MIN - MAX	ACROSS FLATS 'H'	ACROSS CORNERS 'G'	THREAD LENGTH 'B'	
ISO							
20	M20	64.0	8.0 - 13.0	27.0	47.0	15.0	GHG 960 1949 R0111
25	M25	65.0	11.0 - 16.0	32.0	51.0	15.0	GHG 960 1949 R0112
32	M32	80.0	15.0 - 20.0	41.0	68.0	15.0	GHG 960 1949 R0113
40	M40	86.0	19.0 - 27.0	50.0	81.0	15.0	GHG 960 1949 R0114
50	M50	95.0	28.0 - 34.0	60.0	96.0	16.0	GHG 960 1949 R0115
63	M63	105.0	38.0 - 46.0	75.0	107.0	16.0	GHG 960 1949 R0116

All dimensions in mm.