


FXT Flameproof Air Sensing Thermostats

The FXT range of thermostats reflects the design of other FX range of air warmers; the extruded aluminium finned tube can be mounted vertically by bracket or rail. The thermostat can be paired with the FXE heater or used as a standalone product supplied with cables fitted through certified cable glands for termination.




FEATURES

- Certified to ATEX and IECEx standards
- Certified weatherproof protected to IP6X
- Compact design, requires minimal space
- Black anodized convective surface
- Standard product available with short delivery times
- Suitable for ambient temperatures -60°C to +78°C

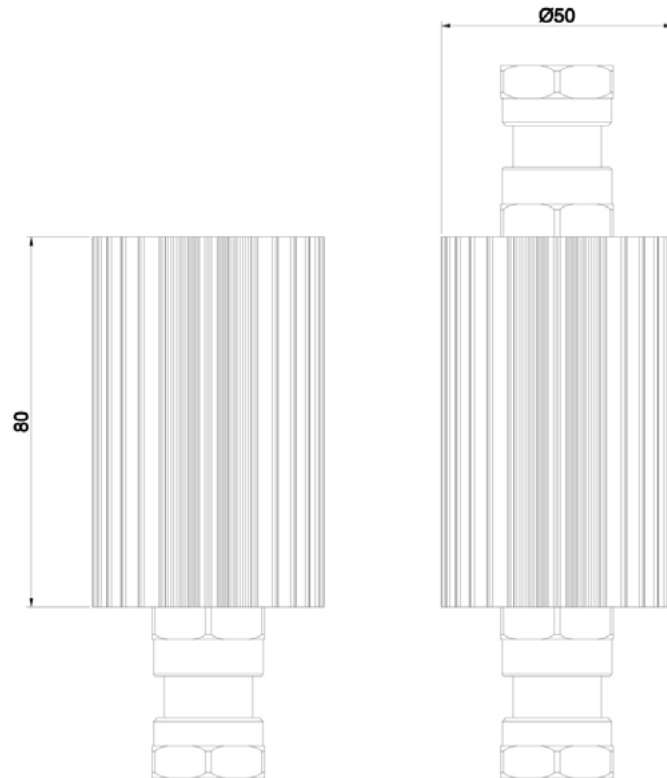

Model	ON / OFF Temperature	Fuse Trip Temperature	Rating
FXT1	-1.5°C / 5°C	76°C (+/- 3°C)	Up to 1.30A
FXT2	11.5°C / 17°C	76°C (+/- 3°C)	Up to 1.30A
FXT3	33.5°C / 40°C	76°C (+/- 3°C)	Up to 1.30A

- Certification** ATEX / IECEx  II 2 G/D
Ex d IIC T6 Gb Zone 1 and 2
Ex tb IIIC T85°C Db Zone 21 and 22
CU TR approval upcoming
- Extrusion** Finned aluminium, anodised matt black
- Mounting** Vertically mounted by bracket or rail
- Voltage** Up to 250V, 1.3A
- Hysteresis** +/- 1.5°C